






The AquaPRO Automatic Filter

Sediment, rust, cloudiness, bad taste, unpleasant odor, metallic flavor, discoloration, whatever your problem, we have a filter system to provide the solution.




AquaPRO
Systems
*Economy
Series 5600*



-  *Standard Warranty*
-  *Polyglass Mineral Tank*
-  *User Friendly Mechanical Control Valve*
-  *Standard Bypass Valve Allows for Ease of Installation and Service*
-  *High Flow Distribution System*

Note: The 5600 Series Controls have been validated by the manufacturer through the Water Quality Association to meet industry Standard S-100-81.

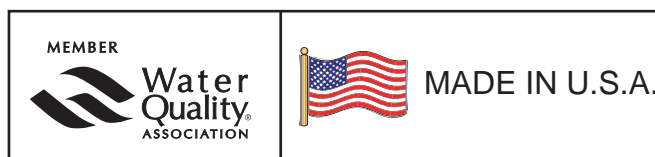

The New Wave



NOTE ABOUT SERIES 5600 FILTERS:

Gravel is included, Media is **NOT INCLUDED** with the unit, it must be ordered separately. Please choose from the following medias:

MEDIAS

Carbon

Unpleasant tastes and odors caused by chlorine or organic substances, such as decayed vegetation and run-off, are adsorbed by top quality activated carbon.

The filter will automatically backwash on the predetermined schedule. This frees the bed of accumulated impurities and readies it for operation again.

Filter Ag Plus™

Suspended particulate matter, such as clay and silt, which gives water a cloudy appearance is trapped in the filter bed to produce clean, clear water.

Filter-Ag Plus's light weight means lower backwash rates and better bed expansion to release trapped sediment and rinse the filter media during the backwash cycle.

Birm®

Birm® is an efficient and economical media for the reduction of dissolved iron and manganese compounds from raw water supplies.

The physical characteristics of Birm® provide an excellent filter media which is easily cleaned by backwashing to remove the precipitant. Birm is not consumed in the iron removal operation and therefore offers a tremendous economic advantage over many other iron removal methods.

SPECIFICATIONS

Model No.	AP5600F-2	AP5600F-4
Mineral Tank Size	10" x 54"	13" x 54"
Cu. Ft.	1.5	2.0
Service Flow	5 gpm	7 gpm
Backwash Rate	5 gpm	7 gpm
Pipe Size	1"	1"
Max. Pressure	100 psi	100 psi

NOTES:

Units standard with 3/4" bypass. Request 1" connection when ordering if needed.

Specifications designed for optimal performance.

For availability of other medias, consult Factory or check with your representative.

Manufacturer

Aqua Treatment Service Inc.
194 Hempt Rd.
Mechanicsburg, PA 17050

Dealer

