

The AquaPRO Automatic Filter


Sediment, rust, cloudiness, bad taste, unpleasant odor, metallic flavor, discoloration, whatever your problem, we have a filter system to provide the solution.



AquaPRO
Systems
4655

-  *Limited Lifetime Warranty*
-  *Stainless Steel Tank*
-  *Electronic Control Valve*
-  *Nickel Plated Brass Valve Body*
-  *Standard Bypass Valve Allows for Ease of Installation and Service*
-  *High Flow Distribution System*

Note: The 4655 Series Controls have been validated by the manufacturer through the Water Quality Association to meet industry Standard S-100-81.

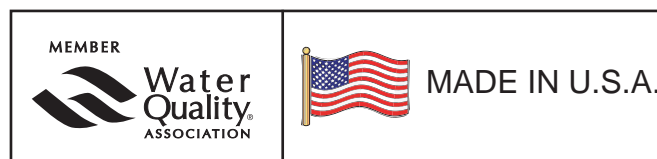

The New Wave



NOTE ABOUT SERIES 4655 FILTERS:

Gravel is included, Media is **NOT INCLUDED** with the unit, it must be ordered separately. Please choose from the following medias:

MEDIAS

Carbon

Unpleasant tastes and odors caused by chlorine or organic substances, such as decayed vegetation and run-off, are adsorbed by top quality activated carbon.

The filter will automatically backwash on the predetermined schedule. This frees the bed of accumulated impurities and readies it for operation again.

Filter Ag Plus™

Suspended particulate matter, such as clay and silt, which gives water a cloudy appearance is trapped in the filter bed to produce clean, clear water.

Filter-Ag Plus's light weight means lower backwash rates and better bed expansion to release trapped sediment and rinse the filter media during the backwash cycle.

Birm®

Birm® is an efficient and economical media for the reduction of dissolved iron and manganese compounds from raw water supplies.

The physical characteristics of Birm® provide an excellent filter media which is easily cleaned by backwashing to remove the precipitant. Birm is not consumed in the iron removal operation and therefore offers a tremendous economic advantage over many other iron removal methods.

SPECIFICATIONS

Model No.	AP4655F-1	AP4655F-2	AP4655F-4
Mineral Tank Size	10" x 36"	10" x 48"	12" x 48"
Cu. Ft.	1.0	1.5	2.0
Service Flow	5 gpm	5 gpm	7 gpm
Backwash Rate	5 gpm	5 gpm	7 gpm
Pipe Size	1"	1"	1"
Max. Pressure	100 psi	100 psi	100 psi
Valve Only Service Flow Min./Max.	20 / 26	20 / 26	20 / 26

NOTES:

Units standard with 3/4" bypass. Request 1" connection when ordering if needed.

Specifications designed for optimal performance. Add approximately 6 inches to tank size to reach overall dimensions. For availability of other medias, consult Factory or check with your representative.

Manufacturer

Aqua Treatment Service Inc.
194 Hempt Rd.
Mechanicsburg, PA 17050

Dealer

